

WIRELESS TOUCH SWITCH / OPEN LED SWITCH

Product synopsis

These products are widely used for auto doors and wireless devices.
These devices can be used within the range of 30m without any additional connector.



GN-W



Specifications

Product	Item	Spec
GN-TR Transmitter	Power supply	DC 3V x 2EA (TYPE : LR03)
	Frequency	2.4Ghz
	Environment	-15°C ~ 60°C
	Distance	30M
GN-W Receiver	Power supply	DC 12 ~ 30V / AC 12~24V
	Relay capacity	AC 125V / 0.5A, DC 30V / 1A (2EA)
	Receive sensitivity	-115dBm
	Size	170mm x 49mm x 27mm
	Current	Stand-by : 20mA / when in use : 20mA

GN-WL



Specifications

Product	Item	Spec
GN-TR Transmitter	Power supply	DC 3V x 2EA (TYPE : LR03)
	Frequency	2.4Ghz
	Environment	-15°C ~ 60°C
	Distance	30M
GN-RE Receiver	Power supply	DC 12 ~ 30V / AC 12~24V
	Relay capacity	AC 125V / 0.5A, DC 30V / 1A (2EA)
	Receive sensitivity	-115dBm
	Size	170mm x 49mm x 27mm
	Current	Stand-by : 20mA / when in use : 20mA
	Safety beam recognition distance	within 10m


GN-BE



Specifications

Product	Item	Spec
GN-RE Receiver	Power supply	DC 12 ~ 30V / AC 12~24V
	Relay capacity	AC 125V / 0.5A, DC 30V / 1A (2EA)
	Frequency	-115dBm
	Size	170mm x 49mm x 27mm
	Consumption current	Stand-by : 20mA / when in use : 20mA
	Recognition distance	within 10m

Installation image

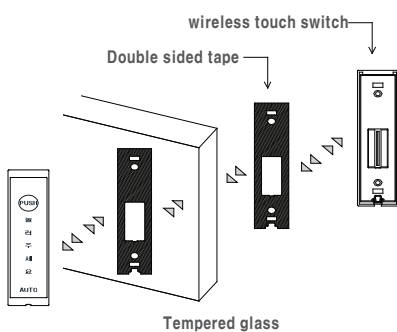

Components and size

